




## **The Stand-On-Command All-Terrain Mobility Rider**



*STAND and play the VertaCat way!*

612-804-6399 [sales@vertacat.com](mailto:sales@vertacat.com) [Vertacat.com](http://Vertacat.com)

955 Wells Street - Suite 400, St. Paul, MN 55106

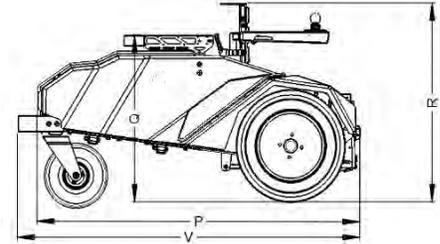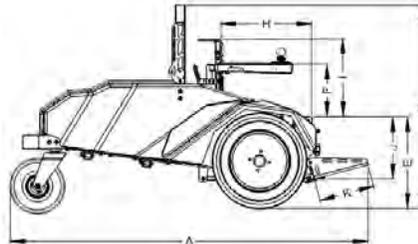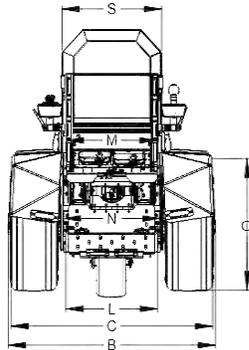

Performance		
Speed		
Selection	Normal mode	Turbo mode
Speed 3	5.8 mph	8 mph
Speed 2	4.5 mph	5.8 mph
Speed 1	3.3 mph	3.3 mph
Range	Up to Fifteen miles	
Max Safe Slope	17 degrees	
Turning clearance	53 inches	
Battery		
Chemistry	Lithium Iron Phosphate	
Max Voltage	58 Volts VDC maximum	
Cycle Life	Over 2,000 Cycles	
Reference letter	Value (Inch/Lbs.)	Description
n/a	680 Lbs.	Weight without operator or accessories
n/a	1030 Lbs.	Gross weight, equipment plus operator and accessories
n/a	69 L x 44 W x 40 H	Shipping dimensions
A	75	Overall length with bumper and footrest
B	36.6	Overall width to widest point of fenders
C	35.6	Width outside front tires
D	41.6	Overall width with golf bag to widest point of fender
E	21.6 – 27.35	Top of seat to ground (no seat cushion or tire deflection)
F	6.4 – 8.5	Top of armrest metal to top of seat (no seat cushion deflection)
G	42.1	Top of utility bar to ground (no tire deflection)
H	14.1 – 19.1	Front of backrest to front of seat (no backrest deflection)
I	10 – 13.5	Top of backrest to top of seat cushion (no seat cushion deflection)
J	14.7 – 21.2	Top of seat cushion to heel of footrest (no seat cushion deflection)
K	11.6	Footrest length
L	15.7	Footrest inside width
M	16	Seat cushion front width
N	17.2	Seat width inside fenders
O	22.1	Outside edge of fender to ground (no tire deflection)
P	58.5	Overall length without the bumper installed and with the footrest up
Q	29.4	Top of utility bar brackets to ground (no tire deflection)
R	31.6 – 40	Top of backrest to ground (no tire deflection)
S	17.6	Utility bar outside width
T	16.5	Backrest outside width
U	14	Backrest inside width
V	61.5	Overall length with bumper installed and the footrest up